



# **CESSNA 400**

## **Radio Control Model Airplane**

### **Operation manual**



# CONTENTS

Statement-----	2
Brief introduction-----	3
Main specifications-----	3
Main configuration-----	3
Products constitution-----	3
Assemble processes-----	4
Adjustment steps-----	6
Safety precautions-----	7
Charging method and cautions-----	8
Caution and Notice for Li-Po battery-----	9
Caution and notice for ESC-----	9
Spare parts-----	10

## Statement

1. Please read this manual carefully and follow the instruction of the manual before you use this products;
2. Our airplane is not a toy, which is only suitable for the experienced manipulator or under the guidance of the experienced pilot.
3. Not recommended for the children under 14 years old.
4. Please adjust this plane according to the instruction and make sure that the finger and other parts of your body out of the rotating parts of the plane, or it may cause damage to the plane or injury to your body.
5. Do not fly in the thunderstorm, strong wind or bad weather.
6. Never fly the plane where there are power lines overhead, automobiles, near aerodrome, railway or highway.
7. Never fly our plane where are crowds of people. Give yourself plenty of room flying, as the plane can fly at a high speed. Remember that you are responsible for others safety.
8. Do not attempt to catch the plane when you are flying it.
9. The user should bear full responsibility of proper operation and usage with regards to this model. We, JRC Model together with any distributor of us will not be responsible for any liability or loss due to improper operation.

## Brief introduction

Thank you for purchasing the "CESSNA " remote control model airplanes from JRC Model, and we hope this plane will bring endless joy to you after you choose it.

- ★With the EPO foam materials, it is very light and strong;
- ★Used the perfect structure design, easy to assemble and maintain, and crash resistance.
- ★Used the perfect power system, it has the strong power and can fly long time;
- ★It can finish the inverted flight, inside loops, outside loops, axial rolls ,and other aerobatic performance.
- ★High scale, and beautiful appearance.

## Main specifications

- ★Wingspan 980mm
- ★Length 800mm
- ★Weight 680g
- ★Thrust  $\geq 680g$
- ★Flying time  $\geq 6$  min


## Main configuration

- ★Radio system 4ch 2.4Gzh E-401 radio
- ★Motor DST-1200
- ★Battery 1300 mAh 11.1V 15C
- ★ESC 20A
- ★Servo 9gX4

## Product constitution

### RTF version

fuselage, main wings, horizontal wings, vertical wings, front landing gear, main landing gear, propeller, stay bar, Cowling set, battery, , radio charger, antenna, accessory bag.

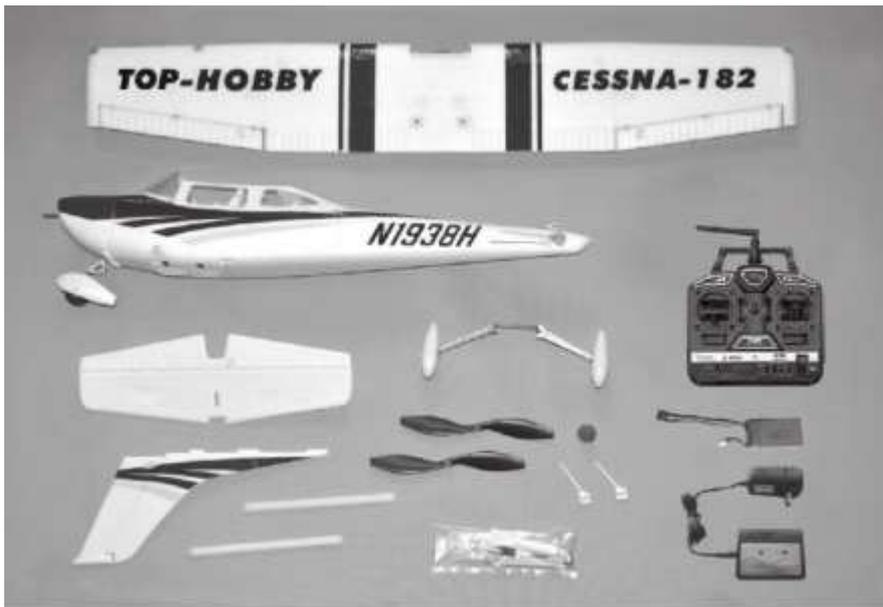

### ARF version

Kits without radio

## PNP version

Kits without radio, charger and battery



## KIT version

Without any electronic parts

## Assemble processes





### 1. Install the main landing gear

Take of the fuselage & main landing gear & stopper & foam glue from the box. Assemble the main landing gear into the slot of the fuselage, and add the glue to the wooden stopper, then insert it into the slot. At last, lock the main landing gear.

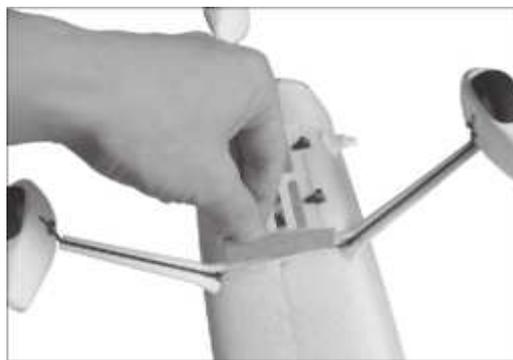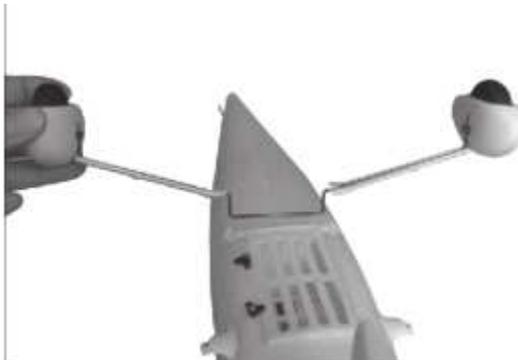






### 2. Install the tail wings

Take of the horizontal wings & vertical wings & foam glue from the box. Add the foam glue to the horizontal wings and fuselage, then insert the horizontal wings to the slot of the tail parts and connect to the fuselage. Use the same method to connect the vertical wing to the fuselage.

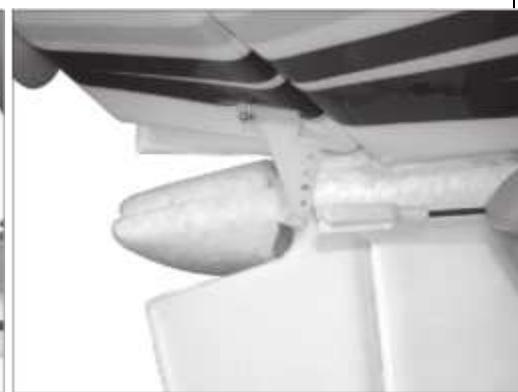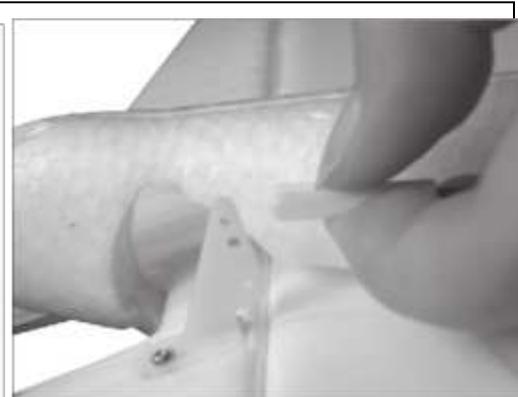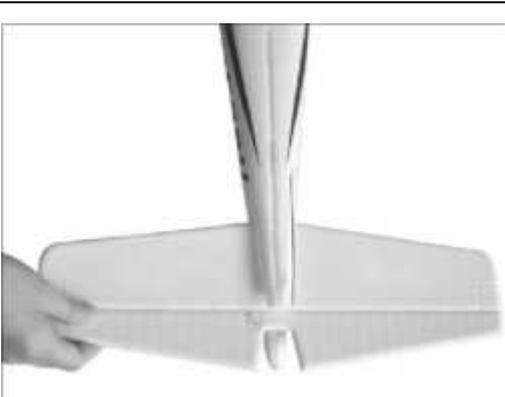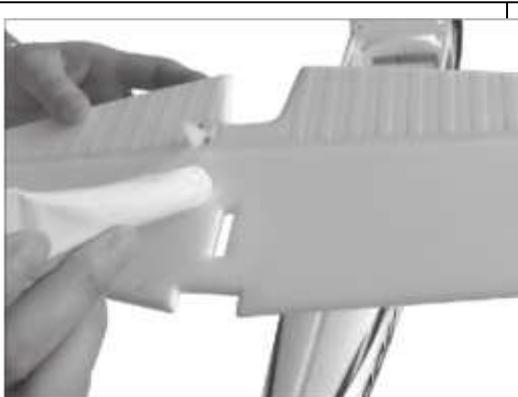

### 3. Install the main wings

Take of the main wings & stay bar & antenna & screws from the box. Connect the navigation light and aileron wire (Make sure the positive and negative cannot be connected reversed.). Insert the main wings into the slot of the fuselage, and use the PM5\*35MM screw to lock it, then lock the stay bar by the PA1.7X10mm screws. At last, please use the foam glue to connect the antenna to the slot of the main wings.

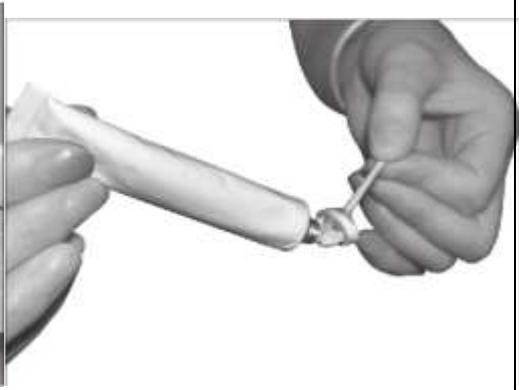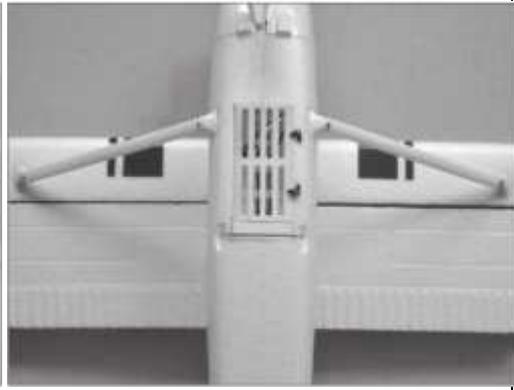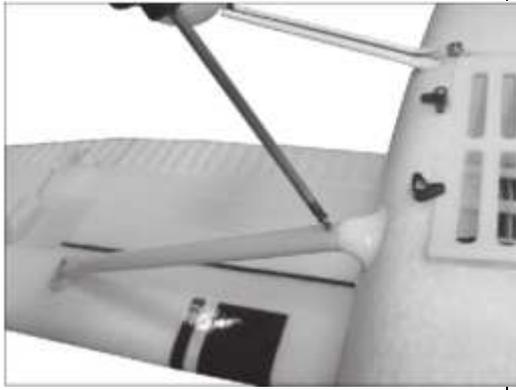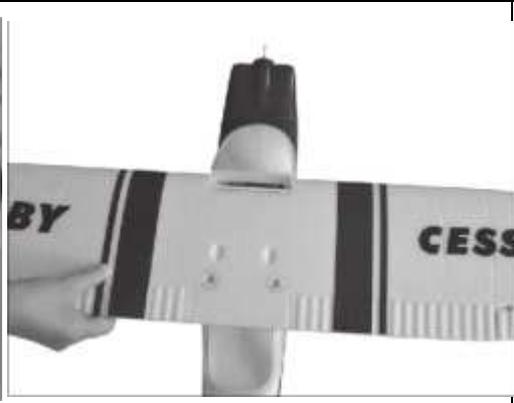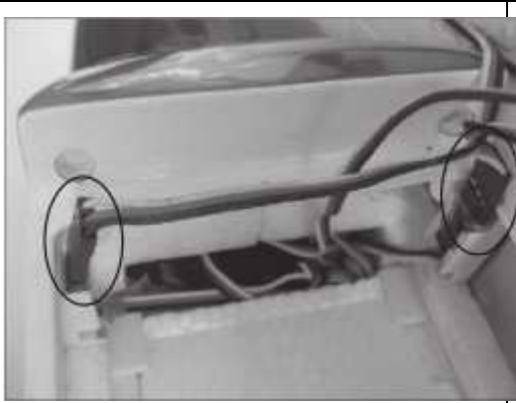

#### 4. Install the propeller

Take of the cowling & propeller & nut & spanner from the box, please lock the propeller by the following pictures.



#### 5. Finished the assembly of the Cessna.



## Adjustment steps

1. Turn on the transmitter, and please make sure that there is enough power for the transmitter. Push the joystick for throttle and throttle trim switch to the lowest position, and other trim switch should be in the neutral position.



2. Please make sure that the battery is full power, and connect to the ESC plug, then install the battery into the battery case.



3. Please catch the back part of the fuselage and push the throttle slowly to make sure that the motor can work normally.



4. Please check the control surface and front wheel can work or not. Do not make it reverse, and make sure that the control surface & free wheel and the joystick are in the same direction.



5. Check the center of gravity and make sure that the CG of the plane should be within the range as indicated by the arrows.



6. Finished the adjustment for CESSNA.

## Safety precautions

1. If you have the simulator, we suggest that you can practice your skill by the simulator before you fly this model, which will bring some help for you.
2. Please climb the plane above the 50 meters with half throttle to fly it when you fly it for your first time,

then you will be familiar with the performance of this plane.

3.You should learn how to control this model blandly, it will reduce the possibility of crash and prolong the usage life of the plane.

4.The turn radius should not be too little, or it will stall and it will increase the possibility of crash.

5.When taking off or landing the plane, you should against the wind.

6.Do not fly the model over your head or behind you, you should fly the model in front of you.

## Charging method and cautions

### Li-Po battery(balance changer) specifications

Specifications:

Input voltage: DC 10V~15V

Output voltage:2S-3S Li-Po battery

Charging current: 1.0A

Indicator state:

Green: Charge complete & no battery

Red: Charging

The batteries are inspected separately. When the voltage reaches 4.20V, the charging process stops.



### Operating

1.Then plug cigarette into its socket in car (Adapter should be connected if charge at home: connect the adapter to home power socket, then plug the adapter' DC end to charger). The LED will turn

green indicating it is ready for charging.

2.Connect the battery to charger per its interface mark. The LED becomes

red, which means charging is on the way.

3.When LED flashing, the charger will enter the stage of drip current

charging. The LED turns green when fully charged , and the battery

will be used at any time.



### Notice

1. While charging is in process, please do not make it near flammable materials.

2.Expect Li poly battery, this charger is not allowed for other kinds of battery.

3. While charging, please keep it out of the reach of Children.

4. When this charger is in use, please do not go away and leave it unwatched, if any abnormality occurs (such as the power indicator is off, the temperature of the battery rise rapidly, etc.) stop charging immediately.

5. Please do not use power with output voltage higher than 15V.

6. Please do not disassemble the charger or its accessories.

7. When the battery is not cool down, please do not urge to charge it.

8.Be fully charged under no more than 1 A voltage by using the specified charger.

9.Be discharged under 10C voltage but avoiding discharge time too long to harm the battery.

10.Repeat the first and second step one or two times.

11.When the Li-poly battery was stored more than 3 months, it needs to be recharged to maintain its voltage,

and ensure its life time.




## **Safety Instruction of Li-Po/Ni-MH battery**

1. Do not disassemble or reconstruct the battery.
2. Do not short-circuit the battery.
3. Do not use or leave the battery nearby the fire, stove or heated place (more than 80°C).
4. Do not immerse the battery in water or sea water, do not get it wet.
5. Do not charge the battery under the blazing sunlight.
6. Do not drive a nail into the battery, strike it by hammer or tread it.
7. Do not impact or toss the battery.
8. Do not use the battery with conspicuous damage or deformation.
9. Do not charge a warm battery. Allow it to cool completely before attempting to charge.
10. Do not reverse charge or over discharge the battery.
11. Do not connect the battery to the ordinary charger socket or car cigarette jack.
12. Do not use the battery for unspecified equipment.
13. Do not touch the leaking battery directly, please wash your skin or clothes with water if they are bedewed by liquid leaking from the battery.
14. Do not mix the Li-Poly battery with other un-chargeable battery in using.
15. Do not continue charging the battery over the prescribed time.
16. Do not put the battery into the microwave oven or high-pressure container.
17. Do not use the abnormal battery.
18. Do not use or keep the battery under the sunlight.
19. Do not use the battery nearby the place where generates static electricity (over 64V).
20. Do not charge the battery when the environmental temperature is under 0°C or over 45°C.
21. If you find the battery leaking, smelling or abnormal, stop using it and return it to the seller.
22. When the battery is charging, please do not make it near the flammable materials!
23. Keep the battery away from the children.
24. Use the specified charger and observe charging requirement (under 1A).
25. When using by minors, parents should show them to the correct instruction.

## **Notification for ESC**

1. The function of this ESC was in the best condition after factory setting; please do not change it by yourself.
2. Before connecting the battery, please make sure the throttle and trim were in the lowest position. If the throttle and trim were not in the lowest position by mistake after connecting the battery, you can cut off the battery; move the throttle and push to the lowest position, then connect the battery.
3. The ESC of the airplane was in a good cooling position after factory assembly; please do not move its position.
4. The ESC should be connected to the brushless motor correctly, otherwise the motor will be reversed turning, and the model airplane can not fly correctly.

# Spare parts

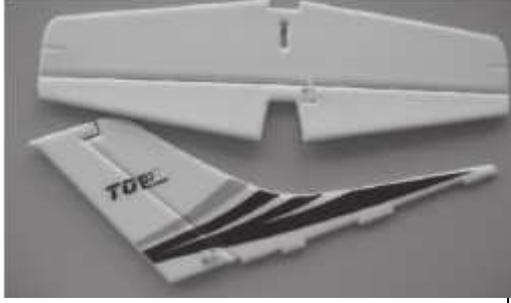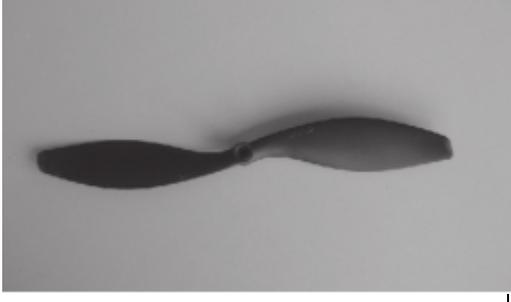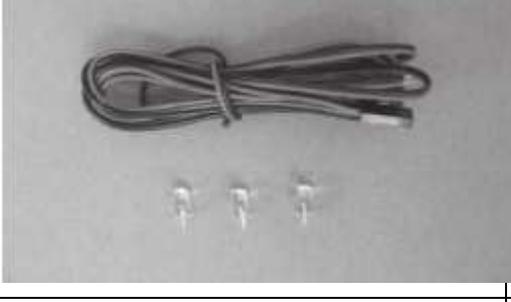		
Fuselage Blue (No.00401) Red (No.00412)	MainWing Blue (No.00402) Red (No.00413)	Canopy Blue (No.00403) Red (No.00414)
		
Tail wings Blue (No. 00404) Red (No.00415)	Landing gear 00405	Spinner 00406
		
Propeller (No. 00407)	Screws set (No. 00408)	Foam glue (No. 00409)
		
20A Brushless ESC (No.202)	11.1V,1300mah LiPo battery (No. 505)	DST-1200 brushless motor (No. 404)
		
Connector wire (No. 00411)	LED lights (No. 00410)	